

➔ Sin [ Sin-2h · Sin-3h ]

Flood sensor

Allows the detection of water leaks in the installation.



➔ Sin-2h

Vertical contact detector 2 wires type to be connected to the KA/KCtr.

- For KA or KCtr smartbox connection
- Vertical mount
- Size: 34 x 70 x 14mm

➔ Sin-3h

Vertical contact detector 3 wires type to be connected to the KA/KCtr.

- For KA or KCtr smartbox connection
- Vertical mount
- Size: 34 x 70 x 14mm

Description

These devices have terminals with sensors that detect water. They are to be installed vertically with the bottom flap touching the ground. For an alarm to sound, the water must be in contact with both metal terminals.

- They should be located in areas of water leaking risk.
- On sloping ground, should be placed at the points where, by fall, the water tends to accumulate.
- Can be installed hidden, because its function is to send information to the automation system.



Technical Characteristics

Device Reference	Voltage Supply	Current Consumption	Max. Recommended Distance
Sin-2h	9–16V DC (KCtr)	Negligible	30m*
Sin-3h	9–16V DC (BUS)	Negligible	30m*

\* maximum recommended distance between sensor and KA/KCtr



➔ Sin

Installation

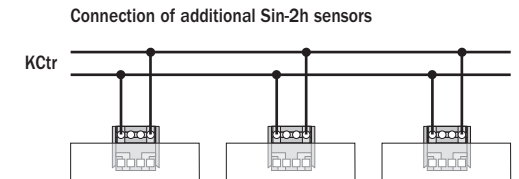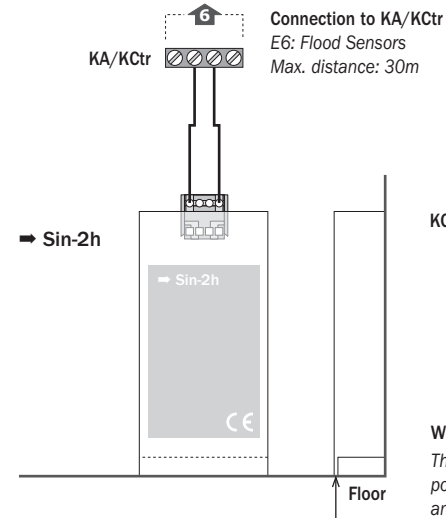

Wall installation

These devices must be installed in vertical position on the wall, with the sensor downside and lapel of the housing stuck to the floor.

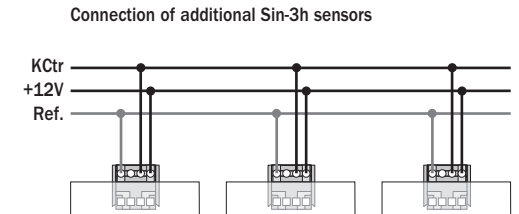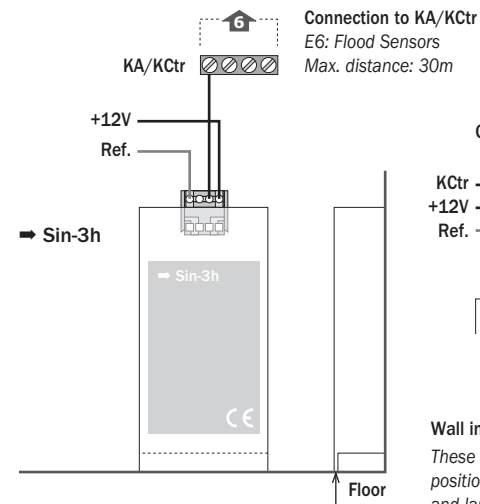

Wall installation

These devices must be installed in vertical position on the wall, with the sensor downside and lapel of the housing stuck to the floor.