


## ➔ BUSing-DKAC-IR

### BUSing® - DAIKIN air conditioning gateway with IR control

Allows control by BUSing® of an air conditioning DAIKIN device

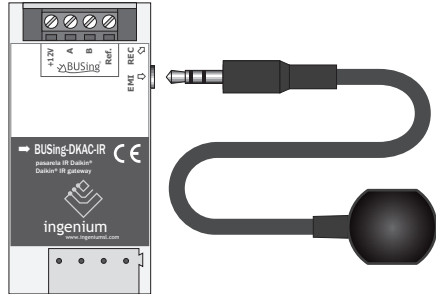

- Suitable for domestic installations
- Connects to the DAIKIN unit by infrared
- Controls one DAIKIN unit
- Mounting hidden next to AC device or ceiling integration
- Size: 37 x 77 x 17mm



#### Description

Gateway suitable for integration of DAIKIN air conditioning system with the BUSing® system control.

Through its infrared emitter connects wirelessly to a DAIKIN domestic air conditioner unit.

It allows to control set-point temperature, current temperature, function modes (cold, heat, ventilation, drying or automatic) and fan speed (low, medium, high or auto).

#### Installation Details

- Device's IR receiver allows to keep updated on the BUSing® system control the state of the air conditioning unit. So this IR receiver must stay uncovered and accessible by the remote control of the AC unit.

#### Technical Characteristics

Device Reference	Voltage Supply	Current Consumption	No. AC units Controllable
BUSing-DKAC-IR	9-16V DC (BUS)	40mA (BUS)	1

## ➔ BUSing-DKAC-IR

### installation

